




OKS 1360 - Product Information

Fields of Application:

Release agent for foundry-, injection- and blow- moulding as well as for extrusion of plastics and elastomeres. Against sticking of glues and sealing materials or wetting by water. Sliding film against noise causing rubbing of plastics, elastomeres and metals with each other. For easy permeation of plastic and elastomere profiles, e.g. in windows and doors. For the lubrication of cutting edges in paper, cardboard, veneer and textile machines.

OKS 1360

Silicone Release Agent

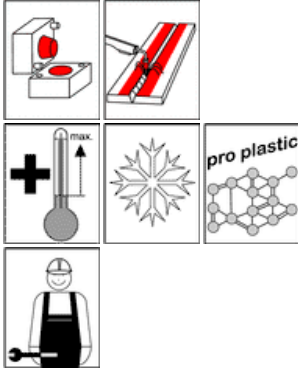

Advantages and Benefits:

High efficiency by distinctive surface wetting. Separation film with antistatik properties. Manifold application for a long time lubrication, protection, maintenance and impregnation in a wide temperature range. Minimal consumption through formation of extrem thin films. Waterresistant and weatherproof. Released by the BAM for lubrication of screw caps threads on oxygen cylinders at operating temperatures up to +60 °C and 15 bar.

Application:

For optimal effect clean surface, first mechanically and then with OKS 2610/OKS 2611 Universal Cleaner. Apply evenly thin with brush, drop oiler or by dipping. Distribution happens mostly independent by spreading. Avoid excess. Only mix with appropriate lubricants. Plastics based on silicone could be effected by silicone oil. At sliding aereas with pure oxigen no silicone has to be used. For further questions please contact our Technical Department.

Additional Information:

Packaging (article number):

- 1 l Tin (01360034)
- 5 l Canister (01360050)
- 25 l Canister (01360062)

Version:

E-05.1/05

The data in this brochure are the result of extensive testing and experience and meet the latest stage of engineering. Due to the diversity of application possibilities and technical realities they can only be recommendations and are not arbitrarily transferable; thus no obligations, liability or warranty claims can be derived herefrom. We accept liability for the fitness of our products for particular purposes and accept such liability in writing in the individual case. In any event any justified warranty claims shall be limited to the delivery of replacement goods which are free from defect or, in the event that such subsequent improvement fails, to reimbursement of the purchase price. Any and all further claims, in particular but without limitation any liability for consequent damage, shall be excluded. Prior to use own testing must be done to prove suitability. The data are subject to change for the sake of technical progress. ® = Registered Trademark



OKS 1360 Silicone Release Agent

Technical Data

	Norm	Conditions	Unit	Value
Base Oil				
Type				Polydimethylsiloxane
Viscosity	DIN 51 562-1	+25 °C	mm ² /s	50
Pourpoint	DIN ISO 3016	3° C step	°C	-50
Flash point	DIN ISO 2592	> 79	°C	> 300
Application Data				
Density	DIN EN ISO 3838	+20 °C	g/ml	0,97
Colour				colourless
Service Temperatures				
Minimum service temperature			°C	-60
Maximum service temperature			°C	200
Releases / Specifications				
Miscellaneous	BAM	Oxygen up to 60 °C/15 bar		Tgb.-Nr. II-77/00 from 21.02.00

The data in this brochure are the result of extensive testing and experience and meet the latest stage of engineering. Due to the diversity of application possibilities and technical realities they can only be recommendations and are not arbitrarily transferable; thus no obligations, liability or warranty claims can be derived herefrom. We accept liability for the fitness of our products for particular purposes and accept such liability in writing in the individual case. In any event any justified warranty claims shall be limited to the delivery of replacement goods which are free from defect or, in the event that such subsequent improvement fails, to reimbursement of the purchase price. Any and all further claims, in particular but without limitation any liability for consequent damage, shall be excluded. Prior to use own testing must be done to prove suitability. The data are subject to change for the sake of technical progress. ® = Registered Trademark