



OKS 250 - Product Information

Fields of Application:

Lubrication of all kinds of highly stressed sliding surfaces, especially at low slip speeds or with oscillating movements, for example with screwed-, mating or bayonet connections made of steel or non-ferrous metals. Parting of temperature-stressed screwed connections – for example, in combustion engines and turbines – even after extended periods of operation. Corrosion protection for screws, pins, bolts, flanges, spindles and adapters in refineries, steel and cement works and also for ships and agricultural machinery.

OKS 250 White Allround Paste, metal free

Advantages and Benefits:

A single paste for many different applications. Lubricates very well, reduces wear, provides dependable separation, and ensures outstanding protection against corrosion. Economic solution for users who previously relied on a wide variety of special pastes. Resistant to hot and cold water and also to most acids and lyes. Classed under category H2 by the NSF under the number 131379. Contains no metallic pigments and is free of graphite, molybdenum disulphide and also additives containing sulphur. Improved performance due to organic molybdenum complex compounds.

Application:


For best adhesion, clean contamination and other lubricants from thread and slide surfaces. Best way is to clean mechanically first (for example, with a wire brush) and then with OKS 2610 or OKS 2611 universal cleaning agent. Use a brush, spatula or similar to apply a suitable quantity of paste evenly to the head or nut contact surface and to the thread. The paste will also act as a sealant. Do not use paste instead of grease and mix only with suitable lubricants. Our customer advice service will be pleased to help should you have any further questions.

Additional Information:

Packaging (Article number):

- 10 g Tube (00250011)
- 100 g Tube (00250012)
- 250 g Brush tin (00250030)
- 1 kg Tin (00250034)
- 5 kg Hobbock (00250050)
- 25 kg Hobbock (00250062)

Version:
E-05.1/05

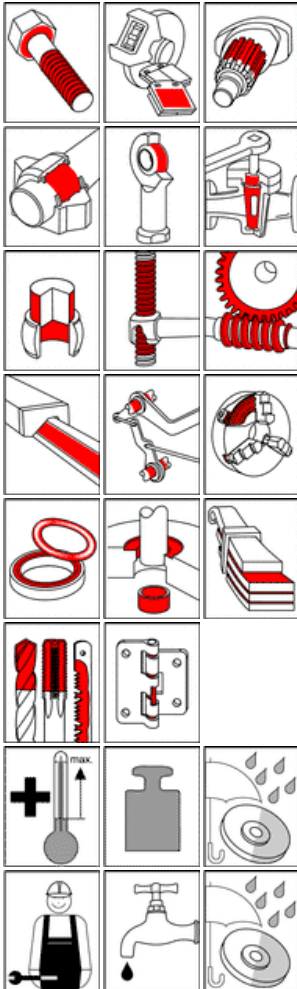

The data in this brochure are the result of extensive testing and experience and meet the latest stage of engineering. Due to the diversity of application possibilities and technical realities they can only be recommendations and are not arbitrarily transferable; thus no obligations, liability or warranty claims can be derived herefrom. We accept liability for the fitness of our products for particular purposes and accept such liability in writing in the individual case. In any event any justified warranty claims shall be limited to the delivery of replacement goods which are free from defect or, in the event that such subsequent improvement fails, to reimbursement of the purchase price. Any and all further claims, in particular but without limitation any liability for consequent damage, shall be excluded. Prior to use own testing must be done to prove suitability. The data are subject to change for the sake of technical progress. ® = Registered Trademark



OKS 250 White Allround Paste, metal free

Technical Data

	Norm	Conditions	Unit	Value
Base Oil				
Type				Synthetic oil
Viscosity	DIN 51 562-1	+40°C	mm²/s	21
Thickener				
Type				Polyurea
Consistency	DIN 51 818	DIN ISO 2137	NLGI- class	1 - 2
Unworked penetration	DIN ISO 2137	No shear stress	0,1 mm	280 - 320
Drop point	DIN ISO 2176		°C	Not applicable
Oil separation	DIN 51 817	168h/40°C	Mass-%	0,5
Additives				
Solid lubricants, type				White solid lubricants
Solid lubricants, entire share	DIN 51 831-1	> 25 µm	Mass-%	35 - 40
Additives				
Additive				Mo _x -Active
Application Data				
Density	DIN EN ISO 3838	+20°C	g/cm³	1,2
Colour				white
Service Temperatures				
Minimum service temperature			°C	-40
Maximum service temperature, lubrication			°C	200
Maximum service temperature, separation			°C	1400
Water resistance	DIN 51 807-1	+90°C	Grade 1-3	1 - 90
Tests Corrosion Protection				
Salt spray test	DIN 50 021	Layer thickness 50 µm	h	> 500
Wear Protection Tests				
VBT- weld load (Four ball test rig)	DIN 51 350-4		N	4.000
SVR- oscillation friction apparatus		Cyl./plate, 450N, 1000µm, 50Hz, 2h	µ	0,10 - 0,13
SRV-width of wear		Cyl./plate, 450N, 1000µm, 50Hz, 2h	mm	0,3
Friction Values				
Press-fit-test	E DIN 51 833		µ	0,08, no chatter
Thread friction	DIN EN ISO 16047	Screw: ISO 4017 M10x55-8.8 plane Nut: ISO 4032 M10-10 plane	µ	0,10

value				
Break-loose torque	DIN 267-27	M10 A2/40 Nm/400°C/100h	x tightening torque	< 3,0
Specification / Release				
Food processing industry				NSF H2 Reg.-Nr. 131 379

The data in this brochure are the result of extensive testing and experience and meet the latest stage of engineering. Due to the diversity of application possibilities and technical realities they can only be recommendations and are not arbitrarily transferable; thus no obligations, liability or warranty claims can be derived herefrom. We accept liability for the fitness of our products for particular purposes and accept such liability in writing in the individual case. In any event any justified warranty claims shall be limited to the delivery of replacement goods which are free from defect or, in the event that such subsequent improvement fails, to reimbursement of the purchase price. Any and all further claims, in particular but without limitation any liability for consequent damage, shall be excluded. Prior to use own testing must be done to prove suitability. The data are subject to change for the sake of technical progress. ® = Registered Trademark