



OKS 354 - Product Information

Fields of Application:

Lubrication of chains, ball joints, ejecting pins, tentering and drying frames or sliding systems at temperatures up to +250°C or influence of water, e.g. transport systems for paint, stoving, drying and cooling bed equipment of the textile or ceramic industry, brickworks, glassworks, foundries, metallurgical plants, rolling mills, washing equipment, operating valves for power plants, sewage disposal plants, ports, floodgates and dockyards.


OKS 354 High-Temperature Adhesive Lubricant, synthetic

Advantages and Benefits:

Best use as clean fluid lubricant at high temperatures. High efficiency through optimal wear and excellent oxidation protection. Universal application through high resistance against water and steam and penetration properties.

Application:

For best results clean the surface, first mechanically and then with OKS 2610/OKS 2611 Universal Cleaner. Apply sufficient amount onto the lubrication areas with a brush, drip feed lubrication by dipping or automated lubrication systems. Let excess drip off and let product affect before the beginning of operation. Instructions of the machine manufacturer have to be considered. Relubrication period and amount should be stated according the application conditions. Avoid excess. Only mix with appropriate lubricants. For additional questions please contact our Technical Department.

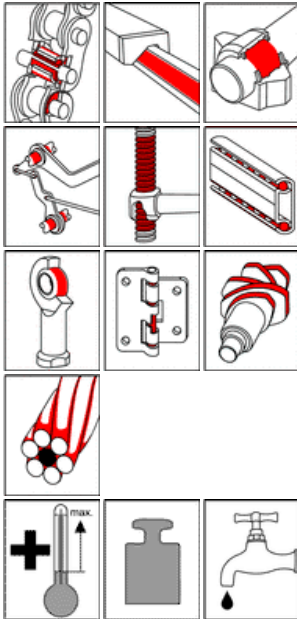

Additional Information:

Packaging (Article number):

- 5 l Canister (00354050)
- 25 l Canister (00354062)
- 200 l Drum (00354072)

Date:

E-11.1/05

The data in this brochure are the result of extensive testing and experience and meet the latest stage of engineering. Due to the diversity of application possibilities and technical realities they can only be recommendations and are not arbitrarily transferable; thus no obligations, liability or warranty claims can be derived herefrom. We accept liability for the fitness of our products for particular purposes and accept such liability in writing in the individual case. In any event any justified warranty claims shall be limited to the delivery of replacement goods which are free from defect or, in the event that such subsequent improvement fails, to reimbursement of the purchase price. Any and all further claims, in particular but without limitation any liability for consequent damage, shall be excluded. Prior to use own testing must be done to prove suitability. The data are subject to change for the sake of technical progress. ® = Registered Trademark



OKS 354 High-Temperature Adhesive Lubricant, synthetic

Technical Data

	Norm	Conditions	Measurement	Value
Classification	DIN 51 502			CLP E 4.000
Base oil				
Type				Ester
Viscosity	DIN 51 562-1	+40°C	mm ² /s	3.800
	DIN 51 562-1	+100°C	mm ² /s	266
Viscosity index	DIN ISO 2909	Method B		200
Pour point	DIN ISO 3016	3°C Step	°C	< -10
Flash point	DIN ISO 2592	> 79	°C	> 230
Additives				
Type				Mo _x - Active
Application Data				
Density	DIN EN ISO 3838	+20°C	g/cm ³	0,92
Colour				green-clear
Service Temperatures				
Minimum Service Temperature			°C	-10
Maximum Service Temperature			°C	250
Wear Protection Tests				
VBT- weld load (Four ball test rig)	DIN 51 350-4		N	2.200
VBT- wear	DIN 51 350-3	1.420 rpm/1 h/300 N	mm	0,5

The data in this brochure are the result of extensive testing and experience and meet the latest stage of engineering. Due to the diversity of application possibilities and technical realities they can only be recommendations and are not arbitrarily transferable; thus no obligations, liability or warranty claims can be derived herefrom. We accept liability for the fitness of our products for particular purposes and accept such liability in writing in the individual case. In any event any justified warranty claims shall be limited to the delivery of replacement goods which are free from defect or, in the event that such subsequent improvement fails, to reimbursement of the purchase price. Any and all further claims, in particular but without limitation any liability for consequent damage, shall be excluded. Prior to use own testing must be done to prove suitability. The data are subject to change for the sake of technical progress. ® = Registered Trademark