



OKS 511 - Product Information

Fields of Application:

Run-in lubrication in cases a oil or grease lubrication is not possible or practical. Shortens and improves run-in conditions of friction bearings, toothing and other sliding pairs, in particular under heavy loads and at low sliding speeds, with oscillating movements or intermittent operation. Dry lubrication with shortened sliding paths, in case by case operation also after long standstills, in case of possible exposure to dust or at high temperatures. Remedial continuous lubrication requires testing. Also for coating punching tools.

OKS 511 MoS₂ Bonded Coating, fast-drying, Spray

Advantages and Benefits:

Highly effective due to good adhesion to prepared substrates. Consistent coefficient of sliding friction under maximum loading of sliding film. Increased wear protection of sliding points that can otherwise not be lubricated. Radiation and vacuum-resistant.


Application:

For optimum adhesion clean surfaces, first mechanically and then with OKS 2610/OKS 2611 Universal Cleaner. The surfaces must be metallic bright and dry. Chemical or mechanical preparation of the surfaces might considerably improve the service life of the bonded coating. Shake well before use. Spray from 20 - 30 cm distance to the prepared surface. Local excess should be avoided. Drying and curing conditions acc. to the following technical data. For further questions please contact our technical department.

Additional Information:

Packaging (article number):
- 400 ml Spray (00511004)

Version:
E-05.1/05

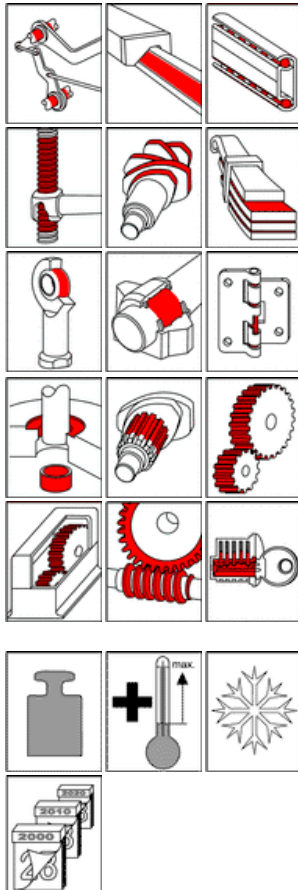

The data in this brochure are the result of extensive testing and experience and meet the latest stage of engineering. Due to the diversity of application possibilities and technical realities they can only be recommendations and are not arbitrarily transferable; thus no obligations, liability or warranty claims can be derived herefrom. We accept liability for the fitness of our products for particular purposes and accept such liability in writing in the individual case. In any event any justified warranty claims shall be limited to the delivery of replacement goods which are free from defect or, in the event that such subsequent improvement fails, to reimbursement of the purchase price. Any and all further claims, in particular but without limitation any liability for consequent damage, shall be excluded. Prior to use own testing must be done to prove suitability. The data are subject to change for the sake of technical progress. ® = Registered Trademark



OKS 511 MoS₂ Bonded Coating, fast-drying, Spray

Technical Data

	Norm	Conditions	Einheit	Wert
Solid Lubricants				
Type				MoS ₂ , Graphite
Binder				
Type				Silicone resin
Solvents				
Type				Butylacetate, Benzine
Flash point	DIN 51 755 (-2)	<65°C (<5°C)	°C	-30
Film Layer				
Optimum layer thickness	DIN 50 981/50 984	DIN 50 982-2	µm	10 - 15
Drying time		°C	min	30
Drying temperature			°C	20
Application Data				
Density	DIN EN ISO 3838	+20°C	g/ml	0,96
Colour				grey-black
Service Temperatures				
Minimum service temperature			°C	-180
Maximum service temperature			°C	450
Friction Values				
Press-fit-test	E DIN 51 833		µ	0,09, no chatter

The data in this brochure are the result of extensive testing and experience and meet the latest stage of engineering. Due to the diversity of application possibilities and technical realities they can only be recommendations and are not arbitrarily transferable; thus no obligations, liability or warranty claims can be derived herefrom. We accept liability for the fitness of our products for particular purposes and accept such liability in writing in the individual case. In any event any justified warranty claims shall be limited to the delivery of replacement goods which are free from defect or, in the event that such subsequent improvement fails, to reimbursement of the purchase price. Any and all further claims, in particular but without limitation any liability for consequent damage, shall be excluded. Prior to use own testing must be done to prove suitability. The data are subject to change for the sake of technical progress. ® = Registered Trademark